





Technical Data Sheet: BeFit Zero Flecks
Revision: Feb 2023

BeFit Zero Flecks

BeFit Zero rubber tiles bring recycled rubber to a whole new level. A revolutionary production method delivers outstanding results and sets new standards for indoor rubber tiles: **ZERO** tolerance for dimensions (0,09%). Plus, EPDM flecks give a colorful note for your rubber flooring.

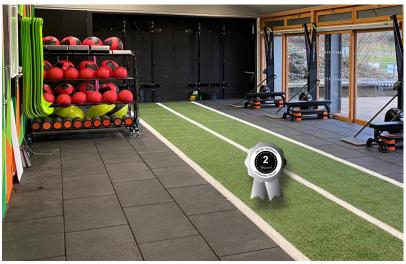







COMPOSITION

Recycled SBR Rubber, MDI polyurethane bonding agent, 100% new EPDM Flecks

SPECIFICATIONS

Ideal for Fitness centers, personal training centers, Functional training centers, etc.

Usage	Indoor
Size	500 x 1000 mm (± 2mm)
Thickness	20 mm (± 1mm)
Color	
Surface	Porous, soft, smooth
Density	950-980 kgs/m³
Weight/m ²	18 kg (20 mm)
Hardness	60 ± 3 Shore A











APPLICATION AREAS

Depending on the thickness selected, Indoor climbing wall areas, fitness facilities, Functional training centers, Personal Training Studios, Crossfit Boxes, etc.

THICKNESS

BeFit Zero Flecks	
20 mm	
Areas where power lifting is involved and dropped weights over 80kgs on a regular basis (such as in dead lift or clean-and-jerk areas). This thickness offer higher cushion and sound absorption.	

CERTIFICATIONS

Fire Resistance	Efl (B2)a,c (EN 13501)
Reaction to Fire	Fs <150 mm in 20 seconds (ISO 11925)
Impact Sound Insulation	26 dB (ISO 10140)
Airborne Sound Insulation	48 dB (ISO 10140)
Abrassion Resistance	0,43 gr (ISO 5470-1)









This TDS is for information purposes only and Beka Sport may change the specifications of this TDS without prior notice. Beka Sport will not be responsible for any misuse of this TDS.

The latest version of this TDS can be found on the website www.bekarubber.com.







