

# BEKA RUBBER

Flooring that meets your needs

Technical Data Sheet: BeRoll Dynamic  
Revision: FEB 2023

## BeRoll Dynamic



**BeRoll Dynamic** is our rubber roll for those who are on a tighter budget. Reliable and cost effective, meet **Dynamic Series**, one of our best selling products.

### COMPOSITION

Fine Recycled SBR granule and MDI polyurethane bonding agent.


### SPECIFICATIONS

Usage	Indoor / Outdoor
Size	1000 x 120 cm 1500 x 120 cm 2000 x 120 cm
Thickness / Weight	10 mm / 10,0kg/m <sup>2</sup> 8 mm / 8,0kg/m <sup>2</sup> 6 mm / 6,0kg/m <sup>2</sup> 4 mm / 4,0kg/m <sup>2</sup>
Color	■
Surface	Porous, soft and smooth
Density	1000-1020 kgs/m <sup>3</sup>
Tolerance of Thickness	5%

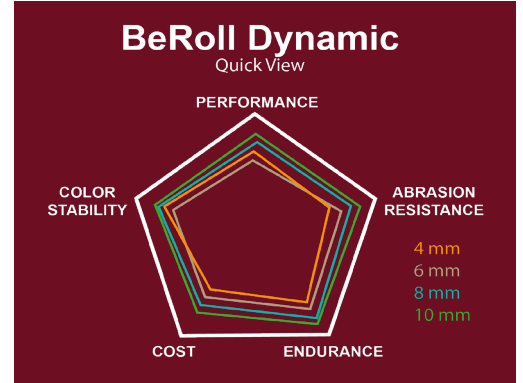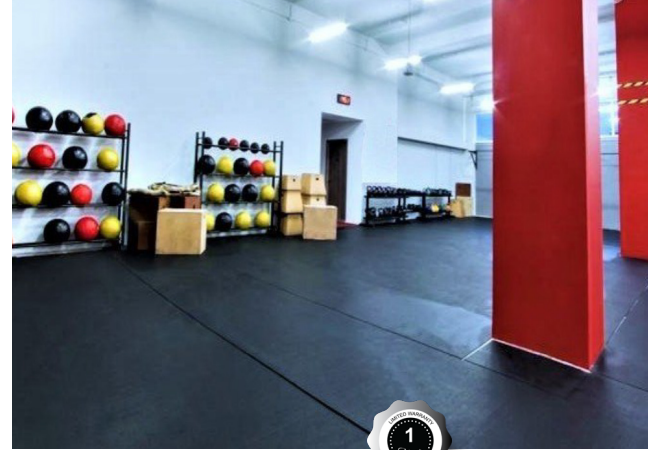

### APPLICATION AREAS

**Dynamic Rolls** have wide application area: protective cover for other flooring (exhibitions, etc.), sub-base for multipurpose sport area & tennis court, acoustic isolation material for buildings, gym flooring, etc.

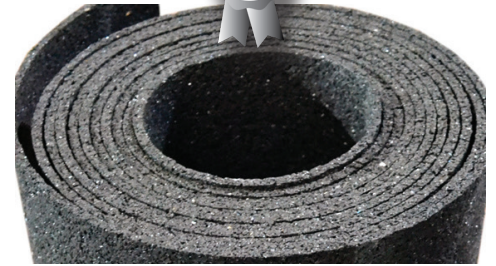

### PROPERTIES

Fire Resistance	Class E (DIN EN 13501-1, 2010)
Chemical Resistance	Conditionally resistant to acids and bases
Cold Fracture Resistance	24 hours / -20° C, no fracture
Cold Cracking Resistance	5 hours / -15° C, no crack
Temperature range	-30°C to 80°C (internal tested)

The product data sheet is not subject to any change service!  
All information is without guarantee.

You can find the latest version of this document on the relevant product page at [www.bekarubber.com](http://www.bekarubber.com).

Beka Spor Zeminleri Ins. San. Ve Dış Tic. Ltd. Sti.  
Orta Mh. Tevfik İleri Cd. Ördekçioğlu İş Mrk. No:32 K:1 D:1,  
34896 Pendik – İstanbul – Turkey  
+90 850 480 2352 – [info@bekasport.com](mailto:info@bekasport.com)

