

BEKA RUBBER

Flooring that meets your needs

Technical Data Sheet: BeRoll Smyrna
Revision: Feb 2023

BeRoll Smyrna

BeRoll Smyrna is a rugged, anti-slip and easy-to-clean floor covering rubber roll used in Fitness centers, commercial gyms, home gym, exhibition halls, ice sports stadiums, rehabilitation centers, equipment storage rooms, etc.



Its high resistance to mechanical wear and its abrasion resistance, make BeRoll Smyrna a good option for those looking for a different aesthetic result for their rubber flooring. These rolls offer nice walking comfort and a good capacity of noise and impact absorption.

COMPOSITION

Recycled SBR granules, 20% new EPDM flecks in different colors, MDI polyurethane bonding agent.

SPECIFICATIONS

Usage	Indoor / Outdoor
Size	1000 x 120 cm 1500 x 120 cm 2000 x 120 cm
Thickness / Weight	10 mm / 10,0 kg/m ² 8 mm / 8,0 kg/m ² 6 mm / 6,0 kg/m ² 4 mm / 4,0 kg/m ²
Color	■ + 20% EPDM flecks.
Surface	Porous, soft and smooth
Density	990-1020 kgs/m ³
Tolerance of Thickness	5%

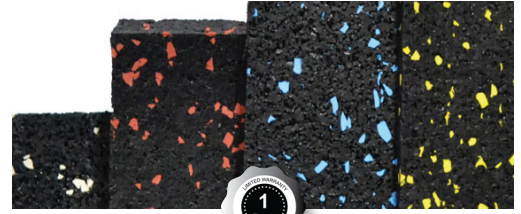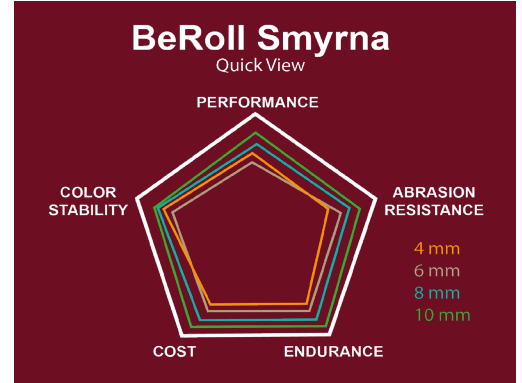

APPLICATION AREAS

Smyrna roll series have a wide application range depending on the thickness selected: protective cover for other flooring (exhibitions, etc.), personal or commercial gym flooring, fitness centers, etc.

PROPERTIES

Fire Resistance	Class E (DIN EN 13501-1, 2010)
Chemical Resistance	Conditionally resistant to acids and bases
Cold Fracture Resistance	24 hours / -20° C, no fracture
Cold Cracking Resistance	5 hours / -15° C, no crack
Temperature range	-30°C to 80°C (internal tested)

The product data sheet is not subject to any change service!

All information is without guarantee.

You can find the latest version of this document on the relevant product page at www.bekarubber.com.

Beka Spor Zeminleri Ins. San. Ve Dış Tic. Ltd. Sti.
Orta Mh. Tevfik İleri Cd. Ördekçioğlu İş Mrk. No:32 K:1 D:1,
34896 Pendik – İstanbul – Turkey
+90 850 480 2352 – info@bekasport.com

